FEATURES & SPECIFICATIONS

MODEL	TX-3□□	TX-3□□AF	TXI-300	TXI-300AF
TYPE	PLATFORM		MANAGEMENT INDICATOR	
DISPLAY	–	5 digit, 20mm LCD		
CONTROLS	–	On/off & 3 key	On/off & 19 key	
IP65	●	●	Watertight case	
PORTABLE	●	●	●	●
RS232C	–	●	●	●
ZIGBEE WIRELESS		●	–	●
ACCURACY	0.1%		–	
OVERLOAD	200% of capacity			
PRINTER	–		Built in thermal printer	
DAILY TOTAL			●	●
MEMORY			10,000 data	
TEMPERATURE RANGE	-20˚C~50˚C			
PRODUCT WEIGHT	24kg	24.3kg	4.0kg	
POWER	–	3.7V Lithium polymer battery (Charger input include)	6V Rechargeable battery	
OPERATING TIME		60hrs.	100hrs.	150hrs.
		Depends on operating mode		
CHARGING ADAPTOR		DC 5V, 1A SMPS	DC 9V, 1A SMPS	
RADIO CLASS		Class 1	–	Class 1
RADIO RANGE		100m (Open space)	–	100m (Open space)

MODEL	TX-310 / 310AF	TX-315 / 315AF
CAPACITY	10,000kg	15,000kg
GRADUATION	10kg	20kg

*** CONSULT FACTORY FOR LOWER & HIGHER CAPACITIES. SPECIFICATIONS SUBJECT TO CHANGE.**

DIMENSIONS

TX-3□□

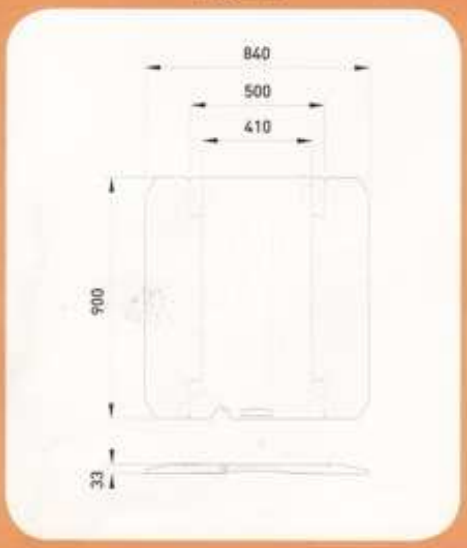

TX-3□□AF

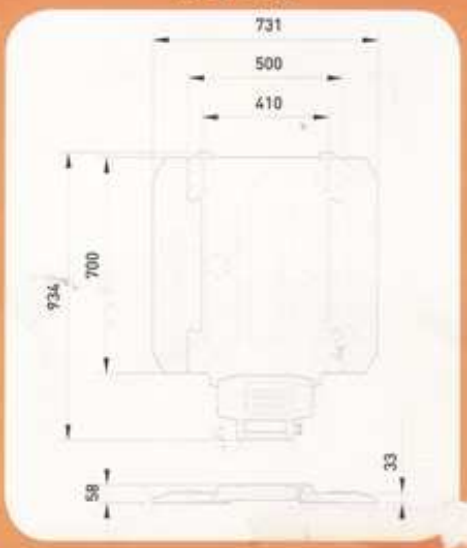

TXI-300 / 300AF

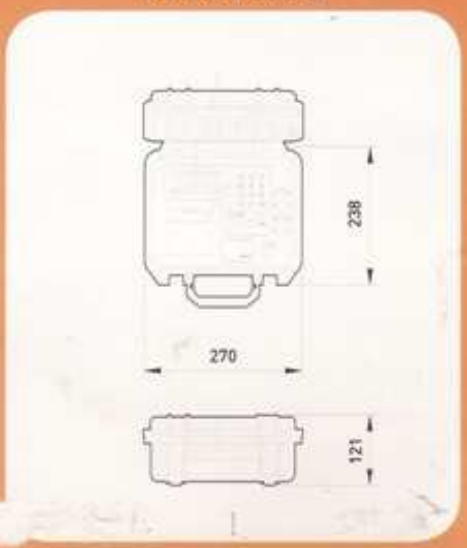

CE 0678